

一、 SPECIFICATIONS :


- 1、 Rated Voltage: 0.66KV
- 2、 Insulation Voltage: 2KV
- 3、 Rated Frequency: 50HZ or 60HZ
- 4、 Operating Temperature: -15°C to 60°C
- 5、 Flame resistance: UL94-V0
- 6、 Certificates:



二、 FEATURES:

- 1、 Small cost
- 2、 Split core design ,Easier installation
- 3、 Build diode ,no high voltage danger
- 4、 Good linearity at very low current

三、 DIMENSIONS(mm):

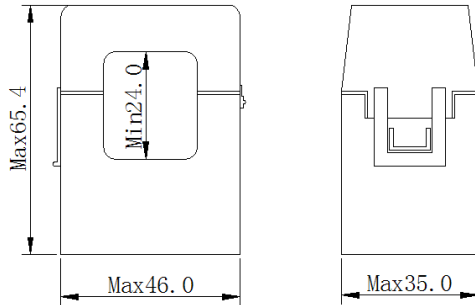

四、 DIMENSIONS(mm):

Model	Input (A)	Max current (A)	Turns (T)	Burden (Ω)	Output
SCT0024-200/66.6mA	10A-200A	200	3000	100	mA/0.333VAC/0-5 VAC

五、 CURVE PERFORMANCE:

